
## REQUIRED GLASS PREP 'A'




DIM X = 27mm + DIM (t) (GLASS THICKNESS)


E.G. 8mm GLASS.

DIM X = 27mm + 8mm = 35mm


# REQUIRED GLASS PREP 'B'



### PLAN VIEW ON FITTING

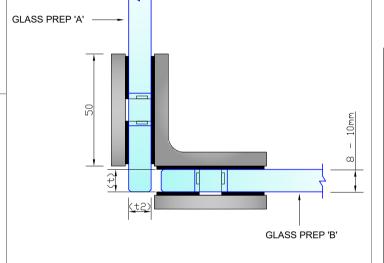

# FRONT VIEW ON FITTING 'A'

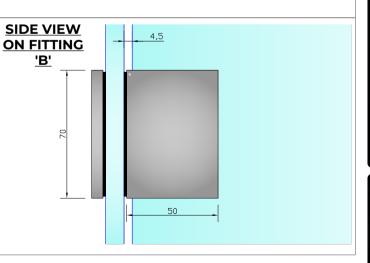



#### The Glass Warehouse, 51-55 Fowler Road, Hainault, Essex, IG6 3UT

Tel: +44 (0)20 8500 1188 info@theglasswarehouse.co.uk www.theglasswarehouse.co.uk

Copyright (C) - October 2020, All Rights Reserved

### NOTES/SPECIFICATION:

ALL VISIBLE COMPONENTS IN BRUSHED NICKEL PLATED BRASS.

PRODUCT SUITABLE FOR 8 TO 10mm TOUGHENED GLASS PANES.

FITTING SUPPLIED COMPLETE WITH:-

1) 4 No. x 1.25mm BLACK RUBBER GLAZING WASHERS. 2) 2 No. M6 x 12mm ST/ST HEX HEAD CSK SETSCREWS.

(NOTE CUSTOMER TO PROVIDE ALTERNATIVE FIXINGS WHERE REQUIRED)

# PRODUCT REF: SH/NKE/B02/S DESCRIPTION: DIMENSIONED ELEVATIONS AND REQUIRED GLASS PREP DETAIL DRAWING REF: SH/NKE/B02/S - 001