


REQUIRED GLASS PREP

(Ø25mm HOLE - POSITIONING TO
SUIT APPLICATION / DESIGN
REQUIREMENTS)



Express Glass Warehouse
51-55 Fowler Road,
Hainault, Essex
IG6 3UT

Tel: +44 (0)20 8500 1188
Fax: +44 (0)20 8500 1010
Email: info@egw.co.uk
Website: www.egw.co.uk

Copyright (C) - October 2020, All Rights Reserved

NOTES/SPECIFICATION:


All fitting components in grade 316 machined stainless steel finish.

Product suitable for 13mm to 21mm toughened glass panels.

Fitting supplied complete with:-


- 1) 2 x 1mm black rubber glazing washers.
- 2) 1 x isolation tube.
- 3) 90mm length M12 HT Stud

FRONT VIEW ON FITTING



NOTE - RADIAL FINISHING
LOCATION OF TIGHTENING HOLE
WILL VARY BETWEEN FITTINGS.

SIDE VIEW ON FITTING

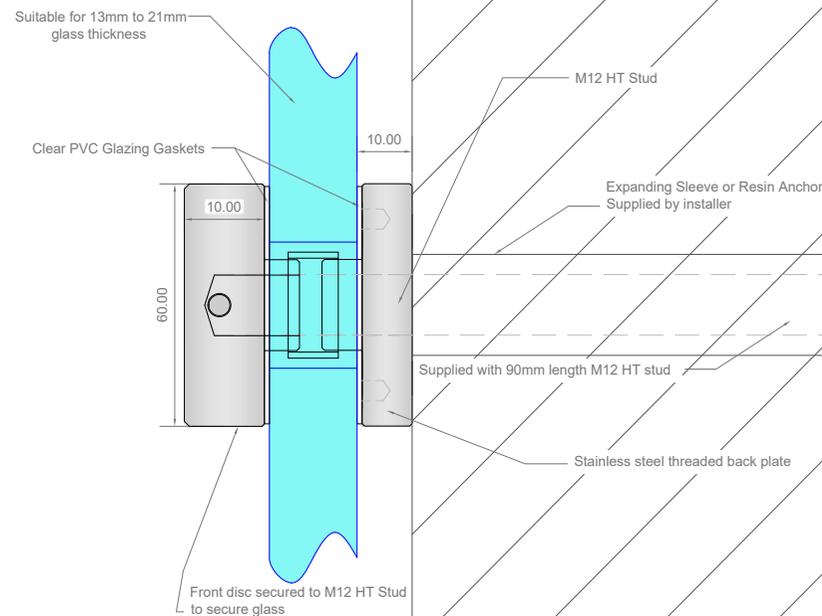

PRODUCT REF: TL/2060

DESCRIPTION: Dimensioned elevations and required glass prep *

DRAWING REF: TL/2060 - 080923